
LARGE FORMAT PRINTER SURECOLOR™ SC-S40670/S60670

Authorised Distributor:



Jl. Tongkol No. 6 BI, Jakarta Utara 14430 T. +62 21 691 0072 F. +62 21 691 0073 www.muliamandiri.com



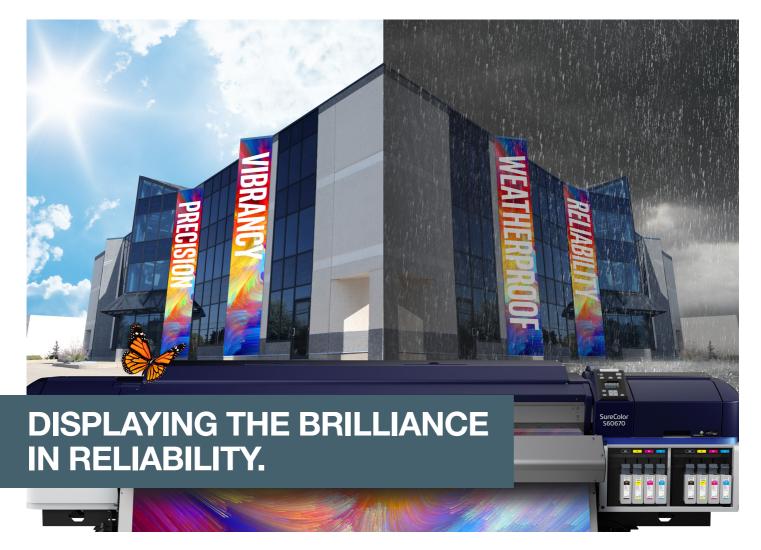

The new Epson SureColor™ S-Series printers are Epson's next generation of high-performance eco-solvent signage printers, which incorporates the latest printing technologies to be Epson's most advanced signage printers to date. The printers come with the new sophisticated precision media feeding system, high-performance PrecisionCore™ TFP printheads and a myriad of advanced features that enable them to reliably meet most demanding jobs while minimising operation costs.





Gold certified and meets the French-VOC A+ Class criteria for low chemical emissions.













Epson UltraChrome™ GS3 ink is Greenguard



4 COLOURS 4 INKS MAX.		GS3	MAXIMUM MEDIA WIDTH	MAX. INK CAPACITY PER COLOUR	PRECISIONCORE TFP PRINTHEAD		DS SQM/HR PRODUCTION**	
	SC-S40670	ULTRACHROME	64"	700ML	SINGLE	8.6	16.6	
	SC-S60670	GS3INK	04		DUAL	14.6	31.6	

ENGINEERED FOR BUSINESS

Exceptional Print Quality

Showcasing Epson's industry-leading PrecisionCore $^{\mathsf{TM}}$ printhead technology and UltraChrome $\ensuremath{^{\text{TM}}}$ GS3 ink, expect consistently vibrant quality with every print.

Superb Reliability

High-volume printing is made ultra-reliable with an advance precision media feeding system to ensure you minimal downtime.

Engineered For Convenience

Automatic media alignment, printhead cleaning and remote management features ensure you great ease during operations.







Only available on the SC-S60670.
 Based on 8-pass printing for high quality and 4-pass printing for production, on banner media.



MODEL NUMBER	SC-S40670	SC-S60670	Dimensions & Weight		
SKU No.	C11CE44402	C11CE46402	SC-S40670		
Printer Width	64 "		Weight: 279 kg (without ink)		
Printing Technology			72	↑	
Print Head	PrecisionCore™ TFP® Printhead	Dual PrecisionCore™ TFP® Printhead	Drion Laboratoria de la Companya de		
Nozzle Configuration	360 x 2 nozzles each colour (x4)	360 x 2 x 2 nozzles each colour (x4)		1,338 mm	
Maximum Resolution	1440 x 1440 dpi		ATT.	1,556 11111	
Minimum Ink Droplet Volume	4.2 pl			•	
Print Speed	 			<u> </u>	
Max Speed - 1 pass	Up to 58.4 m ² /h (360 x 720 dpi)	Up to 95.3 m ² /h (360 x 720 dpi)	.	/200	
High Speed - 2 pass (Billboard)	Up to 29.4 m ² /h (720 x 720 dpi)	Up to 52.3 m²/h (720 x 720 dpi)	2,620 mm	/ 880 mm	
Production 1 - 3 pass	Up to 20.8 m²/h (720 x 720 dpi)		_		
Production 2 - 4 pass	Up to 16.6 m ² /h (720 x 720 dpi)	Up to 31.6 m²/h (720 x 720 dpi)	 SC-S60670 Weight: 291 kg (without ink) 		
Production 3 - 6 pass	Up to 11.0 m²/h (720 x 1440 dpi)	Up to 20.7 m²/h (720 x 1440 dpi)	weight: 291 kg (without link)		
High Quality - 8 pass	Up to 8.6 m²/h (720 x 1440 dpi)	Up to 14.6 m²/h (720 x 1440 dpi)			
Max Quality 1 - 12 pass	Up to 4.7 m ² /h (1440 x 1440 dpi)	Up to 8.7 m ² /h (1440 x 1440 dpi)			
Max Quality 2 - 16 pass	Up to 3.5 m ² /h (1440 x 1440 dpi)	Up to 6.8 m²/h (1440 x 1440 dpi)	1,33		
Max Quality 3 - 24 pass	Up to 2.6 m²/h (1440 x 1440 dpi)	Up to 4.9 m²/h (1440 x 1440 dpi)			
Ink System	<u></u>		The late of		
Ink Type	Enson I IltraChrome™ GS3 Ink Technology			p. ↓	
Colours	Epson UltraChrome™ GS3 Ink Technology 4 colours - Cyan, Magenta, Yellow, Black		0.000	972 mm	
Ink Capacity	700 ml ink cartridge	2,620 mm	972111111		
Paper Handling	Rear roll feed (2 " / 3 " core with max 250 mm dia	imeter and up to 45 kg). Auto take-up reel	_		
Media Type	- Treat for feed (2 7 0 core with max 250 min die	Ink Cartridge Compatibility			
Printable Area	Max printing width: 1616 mm; Side Margin: 5 mm	700 ml Ink Cartridges			
Media Width	300 to 1626 mm	Black	C13T892100		
Media Thickness			- Cyan	C13T892100	
Heaters	Up to 1 mm	Magenta	C13T892300		
Control Panel	Pre- and Platen- Heater (30 to 50 °C); After-Heate	- Yellow	C13T892400		
Connectivity	Z.7 GOIOUI EGD		 Supplies & Optional Accessori 		
Printer Interfaces	Hi Speed LISP 2.0. 100PASE TV / 1000PASE T	2004 LISP 2.0. 100PASE TV / 1000PASE T			
	Hi-Speed USB 2.0, 100BASE-TX / 1000BASE-T		350 ml Cleaning Cartridge	C13T696000	
Printer Languages	Standard: ESC/P raster		Maintenance Parts Kit	C13S210044	
Printer Drivers	510 MD madia + 100 MD mahusuk	Ink CleanerCleaning Stick	C13T699300 C13S090013		
Memory	512 MB main + 128 MB network	Clean Room Wiper	C13S090015		
Software	Standard: CD Installer, Communication Driver, EP	Waste Ink Bottle	C13T724000		
	Information, Epson Control Dashboard, EpsonNe	Additional Print Drying System	C12C932381		
	Software Updater, Onyx RIPCenter	 Media Holding Guide 	C12C932411		
Other Features	Auto Head Alignment Technology (Media feed and				
	Report System, Custom Paper Backup		_		
Power and Operating Requirements					
Power Requirements	Input voltage AC 100-240 V 50/60 Hz / 10 - 5 A		_		
Power Consumption	Operating: Approx. 480 W; Standby: Approx.	Operating: Approx. 745 W; Standby: Approx.			
	330 W w/ heater ON; Sleep: Approx. 12 W;	445 W w/ heater ON; Sleep: Approx. 13 W;			
	Power Off: Less than 1.5 W	Power Off: Less than 1.8 W	_		
Recommended Operating					
Temperature & Humidity	15 - 35 °C; 20 - 80 % RH (non-condensing)				
Printer Dimensions			© 2016 Epson Singapore Pte Ltd. All Rig Reproduction in part or in whole, withou	t the written	
mensions 2,620 x 880 x 1,338 mm (W x D x H) (storage		2,620 x 972 x 1,338 mm (W x D x H) (storage)	permission from Epson, is strictly prohib		
Weight	Substrate Support System (C12C932361), Printer Starter Kit (include 1 set of inks and Onyx RIPCenter) Substrate Support System (C12C932361), Additional Print Drying System (C12C932381), Printer Starter Kit (include 1 set of inks and Onyx RIPCenter) Substrate Support System (C12C932361), Company names used herein are only and are the trademarks or re their respective owners. Epson di in those marks. Print samples sho Specifications and product availal without notice and may vary betw.		Epson Corporation. All other products n	ames and other	
Bundled Items			company names used herein are for ider only and are the trademarks or registere		
			their respective owners. Epson disclaims	s any and all rights	
			in those marks. Print samples shown are simulations only. Specifications and product availability are subject to change		
			without notice and may vary between co- check with local Epson offices for more		

Dealer's Stamp

Authorised Distributor:



Jl. Tongkol No. 6 BI, Jakarta Utara 14430 T. +62 21 691 0072 F. +62 21 691 0073 www.muliamandiri.com

Information correct at time of printing Printed January 2016











To find out more, visit www.epson.com.sg/largeformat or call 800 120 5564